
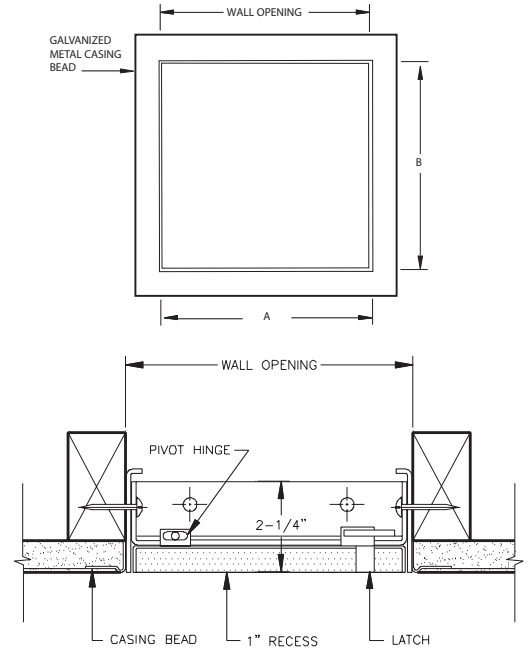


# RGB 4010 RECESSED

## FOR DRYWALL FOR WALLS & CEILINGS

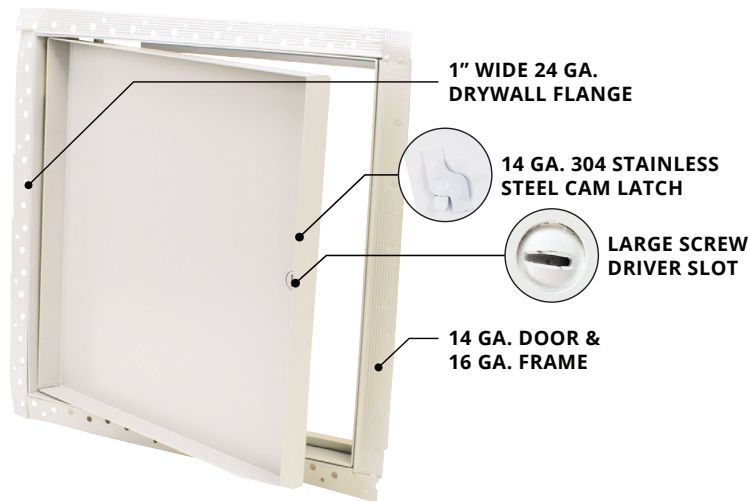

## PRODUCT DETAILS

### CONSTRUCTION

**Door:** 14 ga. steel, 5/8" recessed depth to accommodate drywall.

**Trim:** 16 ga. steel, 1" wide 24 ga. galvanized drywall flange for mounting.

**Finish:** Primed white baked enamel, paintable surface.

**Hinge:** Concealed pivot rod.

**Lock:** Flush, stainless steel cam latch.

Can be installed in the ceiling or wall.

### DURABILITY

Our recessed drywall door gives the option of installing a matching piece of drywall into the door panel keeping the continuity of the visual area.



SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS ▶

## PRODUCT SIZES

### RGB 4010 RECESSED

X	Model Number	Door Size W x H	Wall Opening	Cam Latches	Ship Wt. Lbs.
	RGB 4010	6 x 6	6 1/4 x 6 1/4	1	4
	RGB 4010	8 x 8	8 1/4 x 8 1/4	1	5
	RGB 4010	12 x 12	12 1/4 x 12 1/4	3	8
	RGB 4010	12 x 14	12 1/4 x 14 1/4	3	9
	RGB 4010	16 x 16	16 1/4 x 16 1/4	3	13
	RGB 4010	18 x 18	18 1/4 x 18 1/4	3	14
	RGB 4010	24 x 24*	24 1/4 x 24 1/4	4	24

\*Sizes Available Upon Request  
 Custom sizes available upon request

## OPTIONS

### Finishes:

- Stainless Steel Type 304 No. 4 Satin Finish Brushed
- Stainless Steel Type 316 No. 4 Satin Finish Brushed

### Locks:

- Key Cylinder Locks: Keyed alike 2 keys per door

### Installation:

- 5/8" Gypsum Board installed (RDW 410 2)

### Gasket:

- Weather resistive neoprene gasket all 3 sides  
 Closed cell sponge, blend of Neoprene/EPDM/SBR  
 Meets ASTM D 1056/ SCE 41, RE 41, 2A1/ substrate UL 94HF 1 recognized

Custom Size: \_\_\_\_\_

Project: _____	Date: _____
Contractor: _____	Architect: _____
Sizes: _____	Quantity: _____ App Initials: _____