

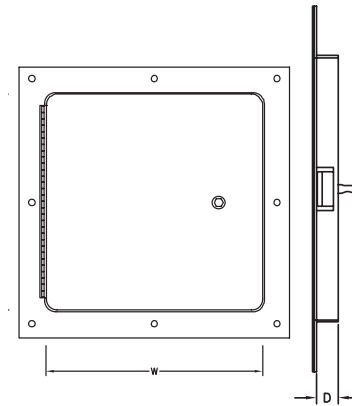


NOVA SM 8040

UNINSULATED FOR WALLS ONLY

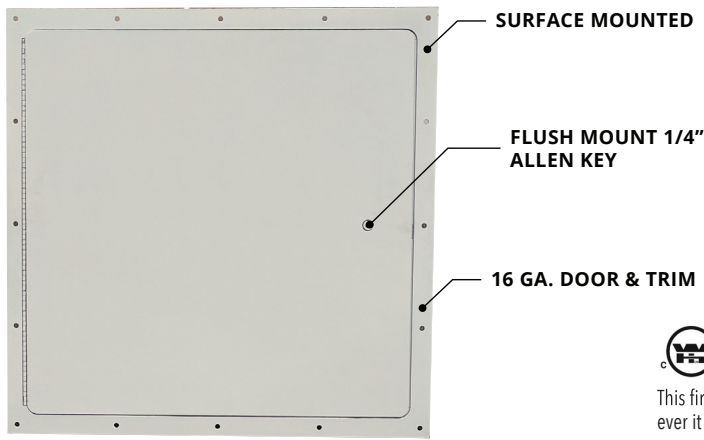

This fire-rated door can be used wherever it is necessary to provide service access to shafts and any other location which must have a fire rating. Approved wall use.

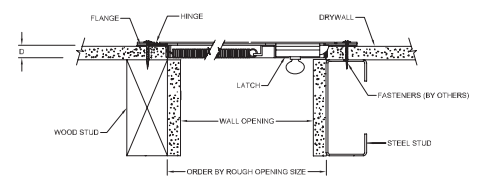

Fire-rated access door, wall only installation for 2 hr only.

PRODUCT DETAILS

CONSTRUCTION

Door and Trim: 16 ga. steel.

Finish: Electrostatically applied rust inhibitive prime coat (off white).

Hinge: Continuous piano hinge.

Lock: The standard factory installed latch is a flush mount 1/4" allen key. All fire rated locks are self latching and include an interior latch release mechanism allowing the doors to be opened from the inside.

Flange: 17/16" exterior flange, frame depth "D" = 5/8" (Overall Dimension = 13/16").

Ordering: Please order by finished rough opening size.

DURABILITY

The panel is surface mounted through all the holes on the outer flange. Review installation drawings before installing. The number of mounting holes will vary with the size of the door. Surface mount, 16mm (5/8") deep door assembly. Ideal when objects (pipes, etc.) interfere with the standard inner door frame. Quick installation, surface mounting holes. Exterior appearance is compatible with the non rated and fire rated access Linhdor access door line, so uniformity of design is maintained when the doors are installed in the same building.



SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS ▶

PRODUCT SIZES

NOVA SM 8040

X	Model Number	Door Size W x H	Wall Opening	Ship Wt. Lbs.
	NOVA SM 8040	6 x 6	6 1/4 x 6 1/4	3
	NOVA SM 8040	8 x 8	8 1/4 x 8 1/4	5
	NOVA SM 8040	10 x 10	10 1/4 x 10 1/4	6
	NOVA SM 8040	12 x 12	12 1/4 x 12 1/4	7
	NOVA SM 8040	18 x 18	18 1/4 x 18 1/4	9
	NOVA SM 8040	24 x 24	24 1/4 x 24 1/4	12

OPTIONS

Custom Size: _____

Project: _____	Date: _____
Contractor: _____	Architect: _____
Sizes: _____	Quantity: _____ App Initials: _____