
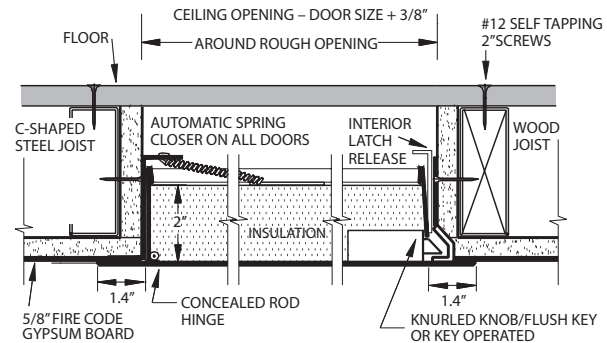


NOVA C 8000

FOR CEILINGS

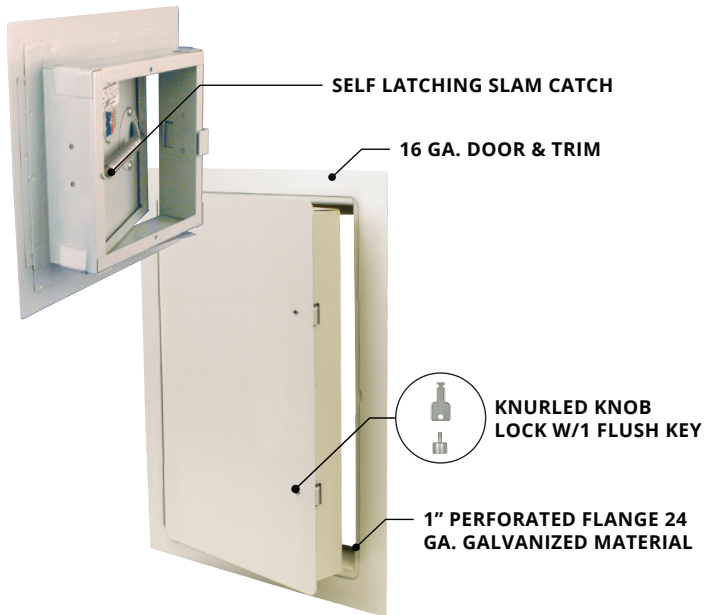

Re-designed and approved by Warnock Hersey International to current 2017 fire code standards. WIN21472.

NOTE: For fire-rated ceiling access doors, on size 16" x 16" and larger, extra spring supplied with door must be attached from back of door pan to framing or floor above. In horizontal (ceiling) applications door has self-assisted closing.

Fire-rated access door for ceiling installation for 3 hr only.

This fire-rated door can be used wherever it is necessary to provide service access to shafts and any other location which must have a fire rating. Approved ceiling use.

**** Hot Smoke Seal™** fire tested: Listed to meet the requirements of standards UL10B, UL10C, UBC 7-2, Part 1 and BS476: 1987 for application to fire rated door assemblies. Tested for smoke controlled assemblies: Listed to meet the requirements of standards UL1784, NFPA 105, UBC 7-2, Part 2, and BS476: Part 31, Section 31.1: 1983. Not affected by moisture and will not break down like fiber or cellulose based products and does not require periodic after market field inspections.

PRODUCT DETAILS

CONSTRUCTION

Door and Trim: Door: 16 ga. steel, Trim: 16 ga. steel: 1" wide perforated flange of 24 ga. galvanized material for mounting purposes, 2 1/2" deep. Laser cut from one sheet of steel, no corner mitering.

Finish: Primed white baked enamel, paintable surface.

Hinge: Fully concealed, pivot rod type hinge. Allows opening to 140.

Lock: Knurled knob lock with 1 flush key.

Insulation: 2" thick mineral wool (ROXUL) in between two pieces of 22 ga. steel.

Can be installed in the ceiling or wall (up to 24" x 48" ceiling). To comply with current fire regulations, largest size acceptable is 24" x 48".

DURABILITY

Access door has rust resistant galvanized steel to protect your interior access door from rust and deterioration.



SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS ►

PRODUCT SIZES

NOVA C 8000

X	Model Number	Door Size W x H	Wall Opening	Latches	Ship Wt. Lbs.
	NOVA C 8000	22 x 42	22 1/4 x 42 1/4	2	54
	NOVA C 8000	22 x 44	22 1/4 x 44 1/4	2	56
	NOVA C 8000	24 x 40	24 1/4 x 40 1/4	2	54
	NOVA C 8000	24 x 48	24 1/4 x 48 1/4	2	62

OPTIONS

Finishes:

- ☐ Stainless Steel Type 304 No. 4 Satin Finish Brushed
☐ Stainless Steel Type 316 No. 4 Satin Finish Brushed

Locks:

- ☐ Mortise Lock/Other
☐ Key Cylinder Locks: Keyed alike 2 keys per door

Gasket:

- ☐ Hot Smoke Seal gasket all 4 sides

Custom Size: _____

Project: _____ **Date:** _____

Contractor: _____ **Architect:** _____

Sizes: _____ **Quantity:** _____ **App Initials:** _____