


RGB AL 4011

ALUMINUM: FIXED HINGES FOR WALLS & CEILINGS

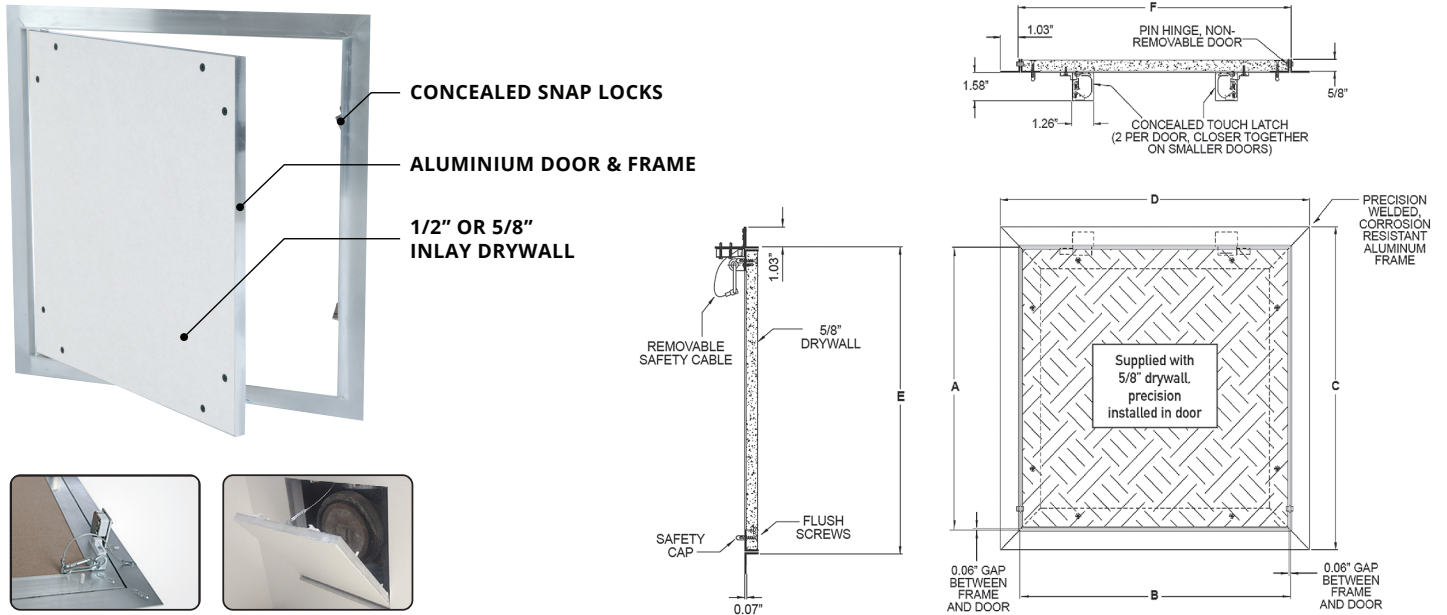

PRODUCT DETAILS

CONSTRUCTION

Consists of a welded aluminium frame and is available with or without 1/2" or 5/8" inlaid drywall and two latches. Outer and an inner frame assembly consists of high grade aluminium bonded with a special welding process. 12" x 12" and up access panels are equipped with a safety system to prevent accidental opening. Must be reattached after each opening.

Reveal of 1/16" of an inch is visible between the outer frame and door hatch.

Concealed snap locks open the access panel when pressure is applied to the spring loaded latch side.

Can be installed in the ceiling or wall.

DURABILITY

Easy assembly. Solid aluminum frame. Flush installation in ceilings and walls and available in moisture resistant, mildew resistant drywall.



SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS ▶

PRODUCT SIZES

RGB AL 4011

X	Model Number	Door Size W x H	Wall Opening	Ship Wt. Lbs.
	RGB AL 4011	8 x 8	8 3/8 x 8 3/8	12
	RGB AL 4011	12 x 12	12 3/8 x 12 3/8	14
	RGB AL 4011	16 x 16	16 3/8 x 16 3/8	17
	RGB AL 4011	18 x 18	18 3/8 x 18 3/8	19
	RGB AL 4011	20 x 20	20 3/8 x 20 3/8	25
	RGB AL 4011	24 x 24	24 3/8 x 24 3/8	34
	RGB AL 4011	24 x 36	24 3/8 x 36 3/8	41

OPTIONS

Locks:
 Cylinder Locks: Keyed alike 2 keys per door

Color: _____

Custom Size: _____

Project: _____ **Date:** _____

Contractor: _____ **Architect:** _____

Sizes: _____ **Quantity:** _____ **App Initials:** _____