



DAW 470 WALK IN

INSULATED DUCT DOOR

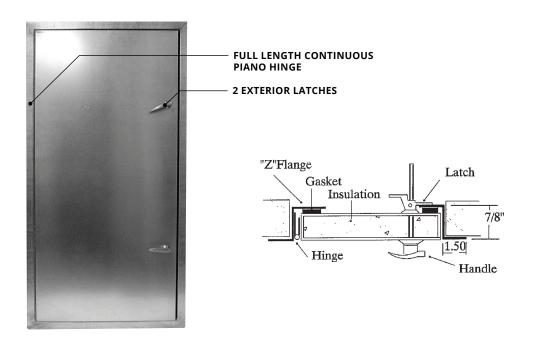



PRODUCT DETAILS

CONSTRUCTION

Door: 20 ga. galvanized steel, double wall.

Trim: 16 ga. galvanized steel.

Finish: Mill finish. Latches: 2 exterior latches with interior handles.

Installation: 1" thick 3lb. density insulation.

Can be installed in walls or ceilings.

DURABILITY

Door is approved for both wall and ceiling use and is also available in stainless steel for use in damp locations. This walk in duct access door and access panel is perfect to allow access to duct work interior and air handling units. This walk in duct access panel features insulation, gasket, and galvanized finish. With easy to reach L handles, the insulated duct access panel is perfect for any situation where an access panel is required for HVAC purposes.

SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS



PRODUCT SIZES

DAW 470 WALK IN

x	Model Number	Door Size W x H
	DAW 470	18 x 36
	DAW 470	18 x 48
	DAW 470	24 x 36
	DAW 470	24 x 48
	DAW 470	24 x 54
	DAW 470	24 x 60
	DAW 470	24 x 66
	DAW 470	24 x 72
	DAW 470	30 x 36
	DAW 470	30 x 48
	DAW 470	30 x 54
	DAW 470	30 x 60
	DAW 470	30 x 66
	DAW 470	30 x 72

OPTIONS

Finishes: Stainless Steel Type 316 No. 4 Satin Finish Brushe	ed			
Other:				
☐ Extra Latches				
☐ Keyed Latches				
100 100 100 100				
Custom Size:				

Project:	Date:			
Contractor:	Architect:			
Sizes:	Quantity:	App Initials:		