


# NOVA RDW-C 8070

## DRYWALL FOR CEILINGS



Fire-rated access door ceiling installation for 3 hr only.

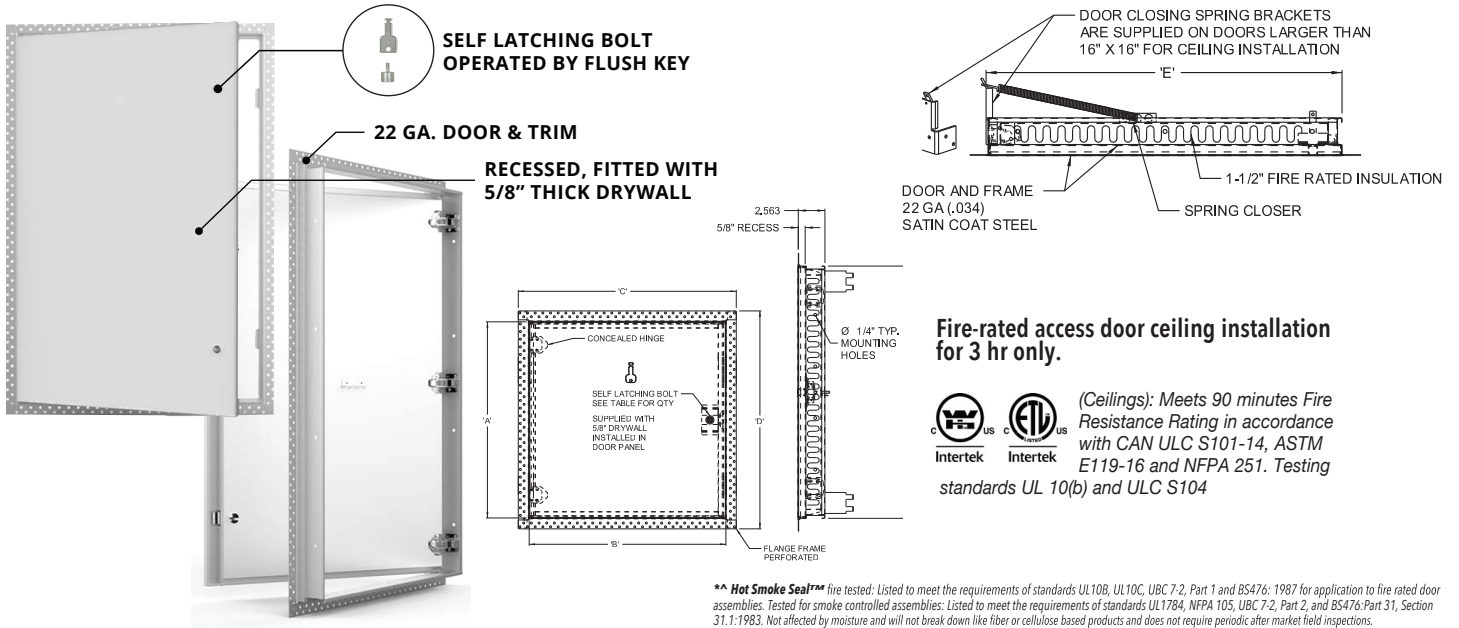

(Ceilings): Meets 90 minutes Fire Resistance Rating in accordance with CAN ULC S101-14, ASTM E119-16 and NFPA 251. Testing standards UL 10(b) and ULC S104

\*\* Hot Smoke Seal™ fire tested: Listed to meet the requirements of standards UL10B, UL10C, UBC 7.2, Part 1 and BS476: 1987 for application to fire rated door assemblies. Tested for smoke controlled assemblies: Listed to meet the requirements of standards UL1784, NFPA 105, UBC 7.2, Part 2, and BS476:Part 31, Section 31.1:1983. Not affected by moisture and will not break down like fiber or cellulose based products and does not require periodic after market field inspections.

## PRODUCT DETAILS

### CONSTRUCTION

**Door and Trim:** 22 ga. steel door. Recessed fitted with 5/8" thick drywall suitable to accept skim coat finish on site. Press bent for strength and rigidity with pre punched flanges for convenient mounting and accepting skim coat finish on site. Perforated Frame ensures trouble free application of skim coat to edge of the door. Zinc coated steel provides superior corrosion resistance.

**Finish:** Satin coat steel.

**Hinge:** Concealed hinge & self centering device ensures seamless appearance in ceiling.

**Lock:** Self closing & self latching door mechanism, operated by flush key.

**Rating:** The RDW C meets 3 hour fire rating requirement. For installation in drywall ceilings requiring concealing of the door panel consistent to surroundings. For use in Fire Rated Ceilings that needs tested and certified doors having Fire Resistance Rating of 90 minutes.

### DURABILITY

Recessed for drywall ceilings for installation in drywall ceilings requiring concealing of the door panel consistent to surroundings.

SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS ▶



## PRODUCT SIZES

NOVA RDW-C 8070

| X | Model Number    | Door Size<br>W x H | Wall Opening    | Slam Catch | Ship Wt. Lbs. |
|---|-----------------|--------------------|-----------------|------------|---------------|
|   | NOVA RDW-C 8070 | 12 x 12            | 12 3/8 x 12 3/8 | 1          | 10            |
|   | NOVA RDW-C 8070 | 16 x 16            | 16 3/8 x 16 3/8 | 1          | 14            |
|   | NOVA RDW-C 8070 | 18 x 18            | 18 3/8 x 18 3/8 | 1          | 18            |
|   | NOVA RDW-C 8070 | 24 x 24            | 24 3/8 x 24 3/8 | 1          | 29            |
|   | NOVA RDW-C 8070 | 24 x 36            | 24 3/8 x 36 3/8 | 2          | 42            |

## OPTIONS

**Locks:**
 Key Cylinder Locks: Keyed alike 2 keys per door

**Custom Size:** \_\_\_\_\_

|                          |                            |
|--------------------------|----------------------------|
| <b>Project:</b> _____    | <b>Date:</b> _____         |
| <b>Contractor:</b> _____ | <b>Architect:</b> _____    |
| <b>Sizes:</b> _____      | <b>Quantity:</b> _____     |
|                          | <b>App Initials:</b> _____ |