


NOVA RDW-W 8060

DRYWALL FOR WALLS

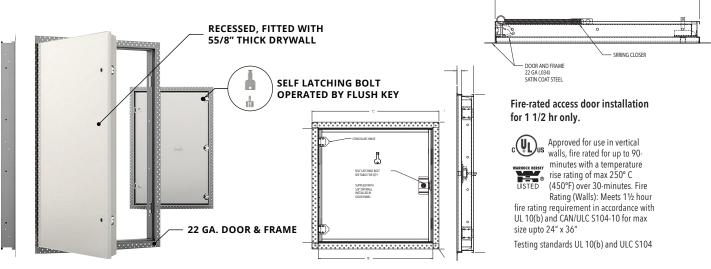

** Hot Smoke Seal?** fire tested: Listed to meet the requirements of standards UL10B, UL10C, UBC 7-2, Part 1 and BS476: 1987 for application to fire rated door assemblies. Tested for smoke controlled assemblies: Listed to meet the requirements of standards UL1784, NFPA 105, UBC 7-2, Part 2, and BS476:Part 31, Section 31.1:1983. Not affected by moisture and will not break down like fiber or cellulose based products and does not require periodic after market field inspections.

PRODUCT DETAILS



CONSTRUCTION

Door and Trim: 22 ga. steel. Recessed fitted with 5/8" thick drywall suitable to accept skim coat finish on site. Press bent for strength and rigidity with pre punched flanges for convenient mounting and accepting skim coat finish on site.

Finish: Satin coat steel.

Hinge: Concealed.

Lock: Self latching bolt, operated by flush key.

Rating: (Walls): Meets 1½ hour fire rating requirement in accordance with UL 10(b) and CAN/ULC S104 10 for max size upto 24" x 36"

DURABILITY

Recessed for drywall ceilings for installation in drywall ceilings requiring concealing of the door panel consistent to surroundings.

SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS



PRODUCT SIZES

NOVA RDW-W 8060

x	Model Number	Door Size W x H	Wall Opening	Slam Catch	Ship Wt. Lbs.
•	NOVA RDW-W 8060	12 x 12	12 3/8 x 12 3/8	1	10
	NOVA RDW-W 8060	16 x 16	16 3/8 x 16 3/8	1	14
	NOVA RDW-W 8060	18 x 18	18 3/8 x 18 3/8	1	18
	NOVA RDW-W 8060	24 x 24	24 3/8 x 24 3/8	1	29
	NOVA RDW-W 8060	24 x 36	24 3/8 x 36 3/8	2	42

OPTIONS

Custom Size: _____

Project:		Date:
Contractor:	Architect:	
Sizes:	Quantity:	App Initials: