


NOVA EXTREME 8010

FOR WALLS & CEILINGS



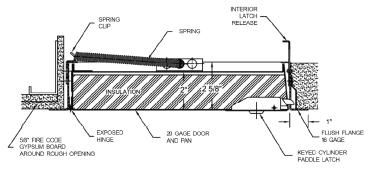

UL, Northbrook, IL - 1-1/2 hour s'B' label for vertical wall installations only. Test file number R-10364. This door may be used in a two hour fire rated wall assembly

Warnock Hersey International; 3 hour fire rated ceiling assembly.

Fire-rated access door for ceiling and wall installation

NOTE: For fire-rated ceiling access doors, on size 16" x 16" and larger, extra spring supplied with door must be attached from back of door pan to framing or floor above. In horizontal (ceiling) applications door has self-assisted closing.

** Hot Smoke Seal*** fire tested: Listed to meet the requirements of standards UL10B, UL10C, UBC 7-2, Part 1 and BS476: 1987 for application to fire rated door assemblies. Tested for smoke controlled assemblies: Listed to meet the requirements of standards UL1784, NFPA 10S, UBC 7-2, Part 2, and BS476-Part 31, Section 31.1:1983. Not affected by moisture and will not break down like fiber or cellulose based products and does not require periodic after market field inspections.

PRODUCT DETAILS



CONSTRUCTION

Door and Trim: 20 ga. steel door and 16 ga. steel trim 2 1/2" deep.

Finish: Primed white baked enamel, paintable surface.

Hinge: Continuous piano type hinge. Allows opening to 140.

Lock: Self latching keyed cylinder paddle latch. 2 keys per door keyed alike.

Ceiling Installation: Largest size acceptable is 24" x 36"

Insulation: 2" thick mineral wool.

Industrial insulation for optimal fire protection (rated noncombustible by NFPA Standard 220 when tested in accordance with ASTM E136 and withstands ASTEM E119) and superior sound control USG tested per ASTM C165/8 pcf STC 15 2" thickness.

DURABILITY

Access door has rust resistant galvannealed steel to protect your interior access door from rust and deterioration.

SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS



PRODUCT SIZES

NOVA EXTREME 8010

Х	Model Number	Door Size W x H	Wall Opening	Paddle Latch	Ship Wt. Lbs.
	NOVA-Ext 8010	8 x 8	8 1/4 x 8 1/4	1	8
	NOVA-Ext 8010	12 x 12	12 1/4 x 12 1/4	1	12
	NOVA-Ext 8010	12 x 24	12 1/4 x 24 1/4	1	19
	NOVA-Ext 8010	14 x 14	14 1/4 x 14 1/4	1	14
	NOVA-Ext 8010	16 x 16	16 1/4 x 16 1/4	1	17
	NOVA-Ext 8010	18 x 18	18 1/4 x 18 1/4	1	21
	NOVA-Ext 8010	22 x 22	22 1/4 x 22 1/4	1	28
	NOVA-Ext 8010	22 x 30	22 1/4 x 30 1/4	2	39
	NOVA-Ext 8010	22 x 36	22 1/4 x 36 1/4	2	47
	NOVA-Ext 8010	24 x 24	24 1/4 x 24 1/4	1	32
	NOVA-Ext 8010	24 x 30	24 1/4 x 30 1/4	2 2 2	43
	NOVA-Ext 8010	24 x 36	24 1/4 x 36 1/4	2	48
	NOVA-Ext 8010	24 x 48	24 1/4 x 48 1/4***	2 2	62
	NOVA-Ext 8010	30 x 30*	30 1/4 x 30 1/4***	2	48
	NOVA-Ext 8010	32 x 32*	32 1/4 x 32 1/4***	2	55
	NOVA-Ext 8010	36 x 36*	36 1/4 x 36 1/4***	2	67
	NOVA-Ext 8010	36 x 48*	36 1/4 x 48 1/4***	2	88
	NOVA-Ext 8010	48 x 48*	48 1/4 x 48 1/4***	2	104

*Sizes Available Upon Request

**Special Orders

***Wall Installation Only

OPTIONS

Sizes:	Quantity: _			-		0		Арр	Ini	tial	s: _	1		1	<u> </u>	-
Contractor:	Architect: _		 0 1	0 0		0 0			0 0	-	0 0	-	0 0	-	0 0	_
Project:			0 1	0 0		0	_ [Date	e: _		0 0	0	0 0			-
						0			0 0				0 0	•	0 0	0
Custom Size:																
☐ Hot Smoke Seal gasket all 4 sides																
Gasket:																
☐ Key Cylinder Locks: Keyed alike 2 keys p	er door															
Mortise Lock/Other																
Locks:																
Stainless Steel Type 316 No. 4 Satin Finis	sh Brushed															
Stainless Steel Type 304 No. 4 Satin Finis																
Finishes:																