


CT 6000 ACOUSTICAL TILE

FOR WALLS & CEILINGS

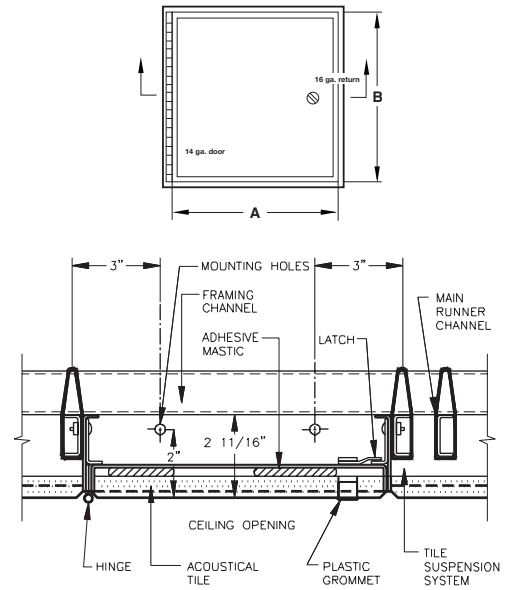

PRODUCT DETAILS

CONSTRUCTION

Door: 16 ga. steel door and frame. Door is recessed to meet sound barriers.

Finish: White baked enamel, paintable surface.

Hinge: Continuous piano hinge opens 180°.

Latch: Flush, stainless steel cam latch. Can be installed in the ceiling or wall.

DURABILITY

A precision door that provides a virtually concealed installation, 5/8" gypsum board, keeping acoustical surfaces intact while contributing to sound control with STC rating and better appearance.



SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS ▶

PRODUCT SIZES

CT 6000 ACOUSTICAL TILE

X	Model Number	Door Size W x H	Wall Opening	Slam Catch	Ship Wt. Lbs.
	CT 6000	12 x 12	12 1/4 x 12 1/4	1	8
	CT 6000	18 x 18	18 1/4 x 18 1/4	3	15
	CT 6000	24 x 24	24 1/4 x 24 1/4	3	28
	CT 6000	24 x 36	24 1/4 x 24 1/4	3	32

OPTIONS

Locks:
 Key operated medium barrel cylinder lock

Gasket:
 Gasket on all 4 sides

Closed cell sponge, blend of Neoprene/EPDM/ SBR

Meets ASTM D 1056/ SCE 41, RE 41, 2A1: substrate UL 94HF 1 recognized

Custom Size: _____

Project: _____	Date: _____
Contractor: _____	Architect: _____
Sizes: _____	Quantity: _____
	App Initials: _____