


RGB AL 4015 DRYWALL

TOUCH LATCH FOR WALLS & CEILINGS

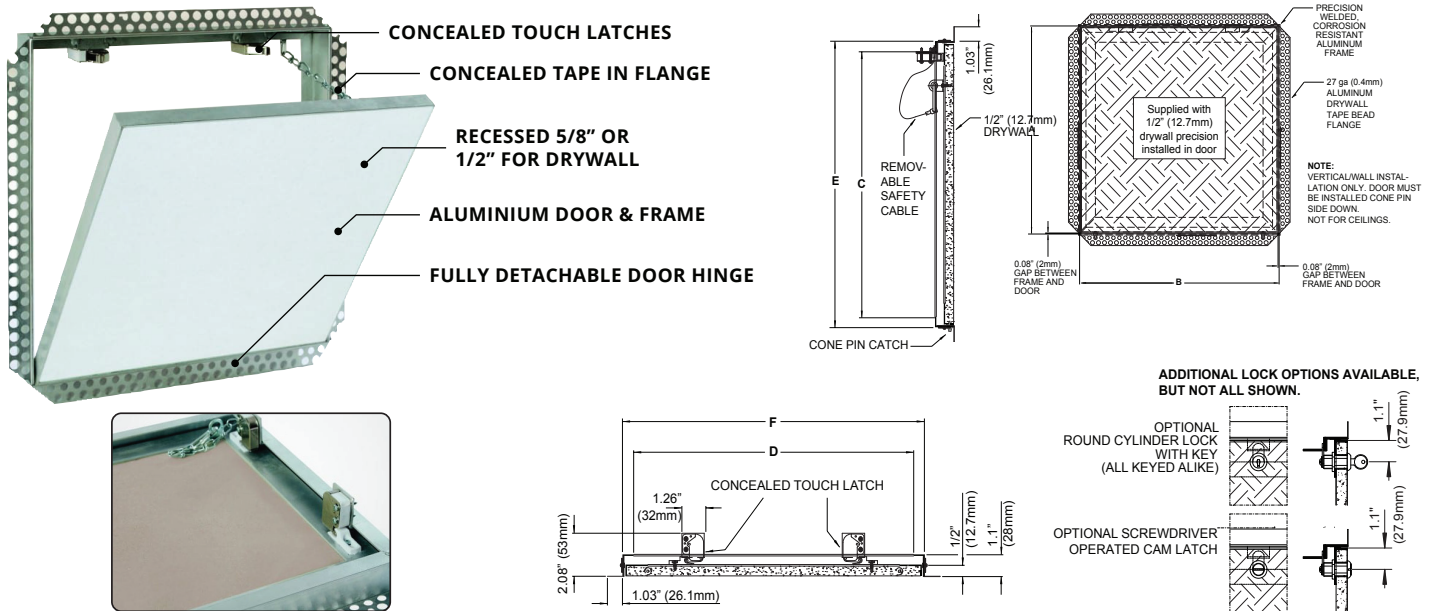

PRODUCT DETAILS

CONSTRUCTION

Door: Corrosion resistant, welded aluminum frame with or without inlayed 1/2" or 5/8" drywall.

Frame and Trim: 1 5/8" wide with outer and inner frame assembly consisting of high grade aluminum bonded with a special welding process.

Finish: Mill finish.

Latches: Concealed touch latches (two per door) open the access panel when pressure is applied to the spring loaded latch side.

Hinges: Open pin cone hinge on bottom. Easy assembly, solid aluminium frame, flush installation.

Can be installed in the ceiling or wall.

DURABILITY

The Linhdor RGB AL 4015 is a drywall access panel with a tape in flange and touch latches. Perfect for any drywall access panel application where a mud in or tape in application is necessary. Featuring a concealed tape in application flange, a safety chain that ships installed with door so that once opened the door hangs safely. This drywall access panel also features pin cone hinges so that the door is fully removable from the frame.



SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS ▶

PRODUCT SIZES

RGB AL 4015 DRYWALL

X	Model Number	Door Size W x H	Wall Opening	Ship Wt. Lbs.
	RGB AL 4015	8 x 8	8 3/8 x 8 3/8	12
	RGB AL 4015	12 x 12	12 3/8 x 12 3/8	14
	RGB AL 4015	16 x 16	16 3/8 x 16 3/8	17
	RGB AL 4015	18 x 18	18 3/8 x 18 3/8	19
	RGB AL 4015	20 x 20	20 3/8 x 20 3/8	25
	RGB AL 4015	24 x 24	24 3/8 x 24 3/8	34
	RGB AL 4015	24 x 36	24 3/8 x 36 3/8	41

OPTIONS

Locks:
 Key Cylinder Locks: Keyed alike 2 keys per door

Custom Size: _____

Project: _____ Date: _____

Contractor: _____ Architect: _____

Sizes: _____ Quantity: _____ App Initials: _____