


OU 7060 EXTERIOR PLASTER

FOR WALLS & CEILINGS

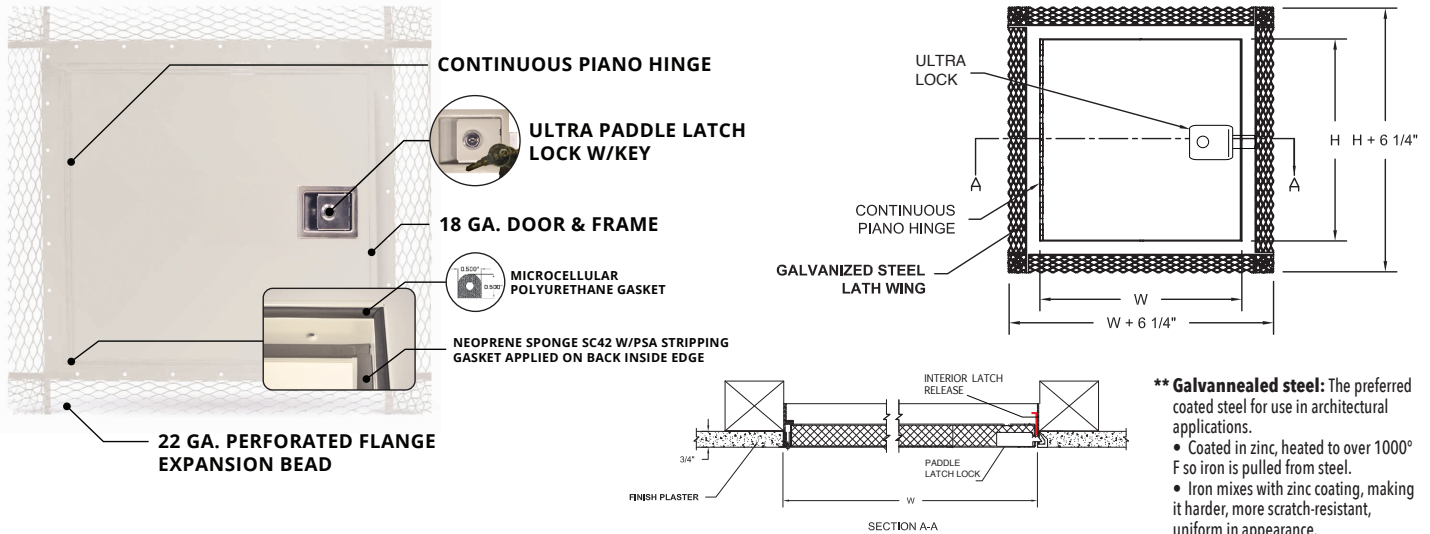

* **GreenGuard**® Extruded Polystyrene insulation board, with R-Value @ 75°F Mean 5.0 x 2. R means resistance to heat flow. The higher the R-Value the greater the insulating power and energy saving capability. Compliance: BOCA 90-78, SBCCI 2228A, ICBO 4280, CA BHF TB 1334, MN Dept. of Energy Chapter 7640, CCMC 12722-L, Und. Lab. Inc. See Classification Certificate A183. FM Approved.

** **Galvannealed steel:** The preferred coated steel for use in architectural applications.

- Coated in zinc, heated to over 1000° F so iron is pulled from steel.
- Iron mixes with zinc coating, making it harder, more scratch-resistant, uniform in appearance.
- Galvannealed steel bonds better with paint, and better for welding.

PRODUCT DETAILS

CONSTRUCTION

Door: 18 ga. steel.

Trim: 18 ga. steel. These models have a 1" wide perforated flange of 22 ga. galvanized steel expansion bead with metal lath.

Finish: Zinc dipped, primed white baked grey enamel.

Hinge: Continuous piano hinge.

Latch: Paddle latch lock and slam catch and interior latch release.

Insulation: Double layer of 1" GreenGuard® Extruded Polystyrene insulation board, with R Value @ 75°F Mean 5.0 x 2, FM approved.

Gasket: Open celled microcellular polyurethane on inside of door and closed cell neoprene sponge SC42 W/PSA stripping gasket on the back of the door.

Application: For exterior purposes, weather resistive.

DURABILITY

The one of a kind exterior access door is galvannealed steel, insulated with 1 GreenGuard® and includes two types of gaskets. Weather resistive open celled microcellular polyurethane gasket and closed cell neoprene sponge SC42 W/PSA stripping gasket on inside for outdoor applications (certain saltwater areas might not be compatible).

SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS ▶



PRODUCT SIZES

OU 7060 EXTERIOR PLASTER

X	Model Number	Door Size W x H	Wall Opening	Ship Wt. Lbs.
	OU 7060	8 x 8	8 1/4 x 8 1/4	25
	OU 7060	12 x 12	12 1/4 x 12 1/4	27
	OU 7060	14 x 14	14 1/4 x 14 1/4	30
	OU 7060	16 x 16	16 1/4 x 16 1/4	35
	OU 7060	18 x 18	18 1/4 x 18 1/4	40
	OU 7060	20 x 20*	20 1/4 x 20 1/4	42
	OU 7060	20 x 30*	20 1/4 x 30 1/4	44
	OU 7060	22 x 22*	22 1/4 x 22 1/4	44
	OU 7060	22 x 30	22 1/4 x 30 1/4	45
	OU 7060	22 x 36	22 1/4 x 36 1/4	50
	OU 7060	24 x 24	24 1/4 x 24 1/4	55
	OU 7060	24 x 30	24 1/4 x 30 1/4	60
	OU 7060	24 x 36	24 1/4 x 36 1/4	67
	OU 7060	24 x 48	24 1/4 x 48 1/4	100
	OU 7060	30 x 30	30 1/4 x 30 1/4	65
	OU 7060	32 x 32*	32 1/4 x 32 1/4	77
	OU 7060	30 x 36	30 1/4 x 36 1/4	79
	OU 7060	30 x 48	30 1/4 x 48 1/4	85
	OU 7060	36 x 36	36 1/4 x 36 1/4	90
	OU 7060	36 x 48*	36 1/4 x 48 1/4	165

*Sizes Available Upon Request

OPTIONS

Color: _____

Custom Size: _____

Project: _____	Date: _____
Contractor: _____	Architect: _____
Sizes: _____	Quantity: _____
	App Initials: _____