



# **OU 7050 EXTERIOR ULTRA**

### FOR WALLS ONLY

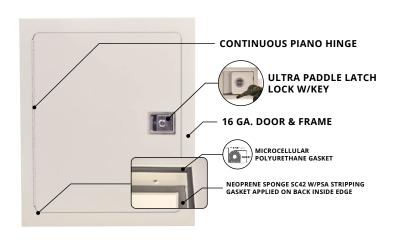


\* GreenGuard\* Extruded Polystyrene insulation board, with R-Value @ 75°F Mean 5.0 x 2. R means resistance to heat flow. The higher the R-Value the greater the insulating power and energy saving capability. Compliance: BOCA 90-78, SBCCI 2228A, ICBO 4280, CA BHF TB 1334, MN Dept. of Energy Chapter 7640, CCMC 12722-L, Und. Lab. Inc.\* See Classification Certificate A183. FM Approved.



- \*\* Galvannealed steel: The preferred coated steel for use in architectural applications.
- Coated in zinc, heated to over 1000°

  Essairan is nulled from steel.
- F so iron is pulled from steel.
- Iron mixes with zinc coating, making it harder, more scratch-resistant, uniform in appearance.
- Galvannealed steel bonds better with paint, and is better for welding.



## PRODUCT DETAILS



#### **CONSTRUCTION**

**Door:** 16 ga. steel. **Trim:** 16 ga. steel.

**Finish:** Primed white baked enamel, paintable surface.

Hinge: Continuous piano hinge.

**Latch:** Paddle latch lock and slam catch and interior latch release.

**Insulation:** Double layer of 1" GreenGuard® Extruded Polystyrene insulation board, with R Value @ 75°F Mean 5.0 x

2, FM approved.

**Gasket:** Open celled microcellular polyurethane on inside of door and closed cell neoprene sponge SC42 W/ PSA stripping gasket on the back of the door.

#### **DURABILITY**

The Linhdor OU 7050 Exterior Ultra is a one-of-a-kind exterior access door made from galvannealed steel insulated with 1GreenGuard® and including two types of gaskets. The weather-resistive open celled microcellular polyurethane gasket and closed cell neoprene sponge SC42 W/PSA stripping gasket inside allows for successful outdoor applications (certain saltwater areas might not be compatible).

SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS



## **PRODUCT SIZES**

**OU 7050 EXTERIOR ULTRA** 

	Model Number	Door Size W x H	Wall Opening	Ship Wt. Lbs.
• •	OU 7050	8 x 8	8 1/4 x 8 1/4	25
	OU 7050	12 x 12	12 1/4 x 12 1/4	27
	OU 7050	14 x 14	14 1/4 x 14 1/4	30
	OU 7050	16 x 16	16 1/4 x 16 1/4	35
	OU 7050	18 x 18	18 1/4 x 18 1/4	40
	OU 7050	20 x 20	20 1/4 x 20 1/4	42
	OU 7050	20 x 30	20 1/4 x 30 1/4	44
	OU 7050	22 x 22	22 1/4 x 22 1/4	44
	OU 7050	22 x 30	22 1/4 x 30 1/4	45
	OU 7050	22 x 36	22 1/4 x 36 1/4	50
	OU 7050	24 x 24	24 1/4 x 24 1/4	55
	OU 7050	24 x 30	24 1/4 x 30 1/4	60
	OU 7050	24 x 36	24 1/4 x 36 1/4	67
	OU 7050	24 x 48	24 1/4 x 48 1/4	100
	OU 7050	30 x 30	30 1/4 x 30 1/4	65
	OU 7050	32 x 32	32 1/4 x 32 1/4	77
7	OU 7050	30 x 36	30 1/4 x 36 1/4	79
	OU 7050	30 x 48	30 1/4 x 48 1/4	85
	OU 7050	36 x 36	36 1/4 x 36 1/4	90
	OU 7050	36 x 48	36 1/4 x 48 1/4	165

\*Sizes Available Upon Request

\*\*Special Orders

# **OPTIONS**

Locks:

Sizes:	_ (	Quantity:								0	App Initials:																			
Contractor:	_ /	Arch	ite	ct:	<u>, , , , , , , , , , , , , , , , , , , </u>		ò	0 0	0	0	0				0				0					0 0	0					
Project:										\ <u>.</u>											Da	ate	: _							-
																	0							_					0 0	
custom size.		-																												
Custom Size:																														
Color:																														
	keyea anke 2	- 100	5 6	C1 (	400	' 1																								
☐ Key Cylinder Locks: K	(eved alike 2	) kev	s n	er (	doc	r																								