
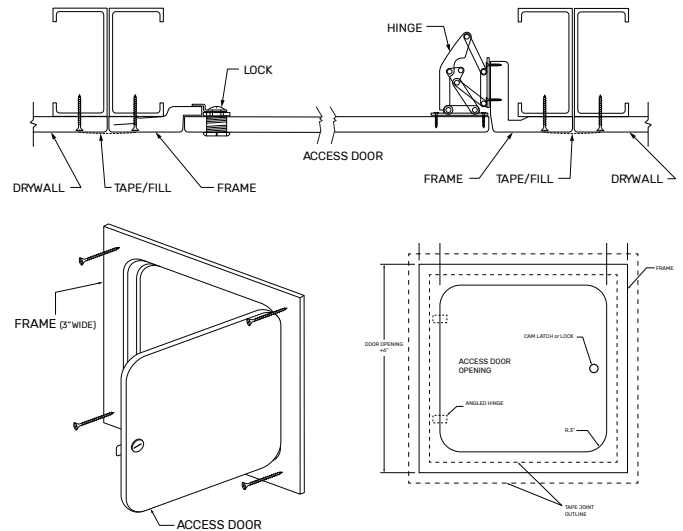


GFE 5150 EXTERIOR HINGED PANEL

FOR CEILINGS

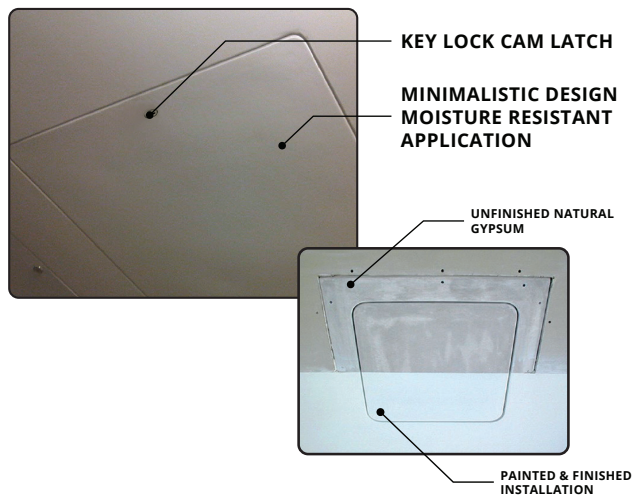

MSDS: Per OSHA HazCom per 29 CFR 1910.1200(b)(6)(iv); "Article" means a manufactured item other than a fluid or particle: (i) which is formed to a specific shape or design during manufacture; (ii) which has end use function(s) dependent in whole or in part upon its shape or design during end use; and (iii) which under normal conditions of use does not release more than very small quantities, e.g., minute or trace amounts of a hazardous chemical (as determined under paragraph (d) of this section), and does not pose a physical hazard or health risk to employees.

PRODUCT DETAILS

CONSTRUCTION

Glass Fiber Reinforced Gypsum (GFRG) based design for exterior applications, including exterior soffits, porte cochère, covered drive up, and any other location where you need discreet access and a weather resistant panel. Showcasing a stealth appearance, tapered edge design that blends in seamlessly with surrounding.

Finish: Unpainted natural GFRG. Paintable surface.

Hinge & Latch: Concealed hinges and key lock cam latch.

Gasket: Gasketed on 4 sides of neoprene/EPDM/SBR. Meets ASTM D 1056/ SCE 41, RE 41, 2A1/ substrate UL 94HF 1 recognized.

Ceiling Installation: Access panels installed with standard supplies: screws are #6 buglehead, and joints use standard tape and joint compound. Substrate material is determined by the job site.

Physical Properties: 1/8" to 3'16" shell thickness, fastener test pull out (wood studs: 525 lbs. avg. and metal studs: 215 lbs. avg.). Fasteners push thru test: 350 lbs avg. Fuel Contribution (ASTM E84 80):0.

Flame spread (ASTM E84 80):0. Combustion (ASTM E84 80): non combustible. Non rated.

DURABILITY

Glass Fiber Reinforced Gypsum (GFRG) ceiling panel, specified for residential and commercial applications where discreet, concealed access is desired.



SEE BACK OF SHEET FOR PRODUCT SIZES AND OPTIONS ►

PRODUCT SIZES

GFE 5150 EXTERIOR HINGED PANEL

X	Model Number	Door Size W x H	Wall Opening	Slam Catch	Ship Wt. Lbs.
	GFE 5150	9x9	15x15		2.5
	GFE 5150	12x12	18x18		5
	GFE 5150	16x16	22x22		8.5
	GFE 5150	18x18	24x24		10
	GFE 5150	24x24	30x30		15

OPTIONS

Custom Size: _____

Project: _____	Date: _____
Contractor: _____	Architect: _____
Sizes: _____	Quantity: _____ App Initials: _____